

Project \_\_\_\_\_  
 Item \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 CSI Section 11400  
 Approval \_\_\_\_\_  
 Date \_\_\_\_\_

### Models

WAREFORCE I HH



### Standard Features

- Electromechanical timer
- Internal sump design
- Built-in waste accumulator
- Delimer switch for easy removal of hard water deposits
- Removable scrap screen
- Air gap instead of vacuum breaker
- Door switch
- Convenient top mounted controls
- Auto start
- Interchangeable upper and lower stainless steel wash / rinse arms
- Wash / rinse thermometer
- Low chemical indicator lights
- Stainless steel adjustable bullet feet

### Mandatory Specs

Specify voltage \_\_\_\_\_

### Options

- Water Hammer Arrestor
- Scaltrol
- False Panel
- Flanged Feet
- Audible Low Product Alarm

### Accessories

- 36-Compartment Rack
  - 4-1/8" tall (105 mm)
  - 5-5/8" tall (143 mm)
  - 7" tall (178 mm)
- Combination Rack
- Peg Rack

### Specifications

Uses 1.61 gallons (6.09 liters) water per rack

39 racks per hour

Single point electrical connection

Self-draining stainless steel pump eliminates soil/detergent carryover between wash and rinse cycles

Fill and dump design disposes of dirty water, replacing it with a fresh water rinse every cycle

Field convertible from straight to corner and vice versa for flexible installations and applications

27" (685.8 mm) vertical inside clearance

Built-in chemical pumps and priming switches

Large removable scrap screen

Durable stainless steel construction



Intertek



Intertek





# WAREFORCE®

## WAREFORCE® IHH

**Legend:**

- E1: Main Electrical Connection (1-1/8" DIA Hole)
- W: Main Inlet Water Connection (3/4" NPT - Female)
- D: Drain Connection (2" NPT - Male)
- DET: Detergent Bulkhead Access (7/8" DIA Hole)
- SAN: Sanitizer Inlet
- RA: Rinse Aid Inlet

All dimensions from the floor can be increased 1.5" using the machine's adjustable feet

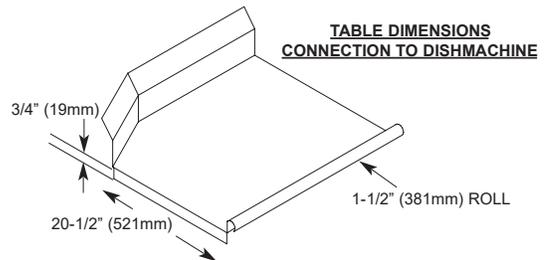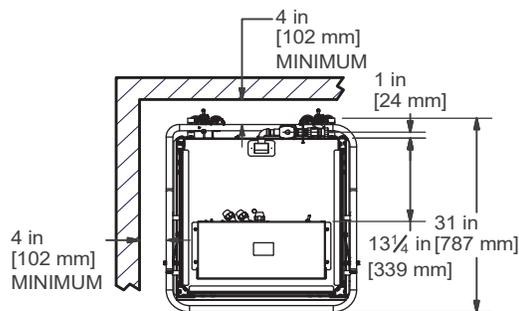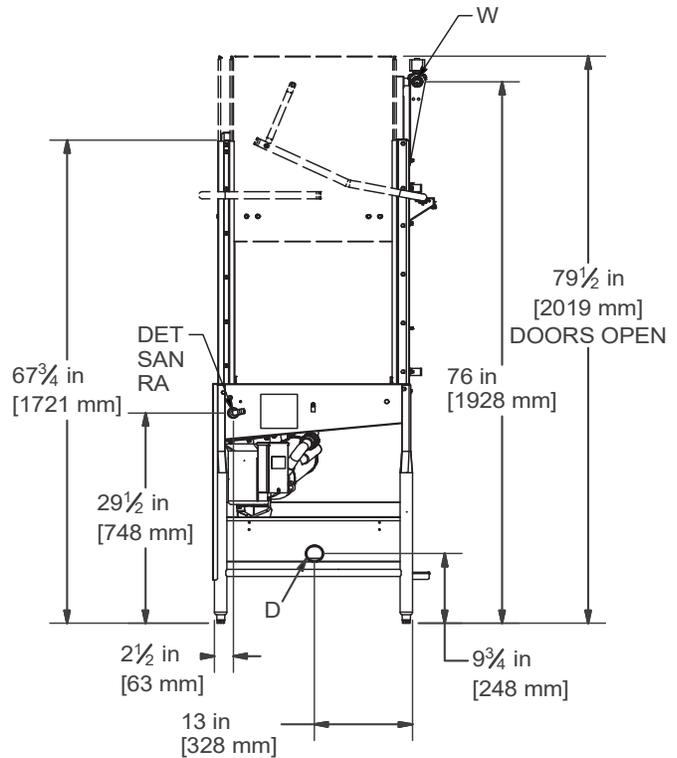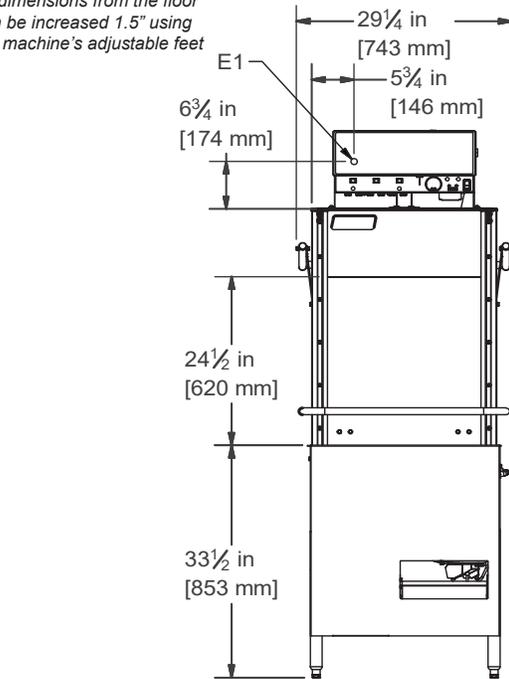

MODEL NO.	MACHINE DIMENSIONS				DRAIN HEIGHT	SHIPPING INFORMATION					
	HEIGHT	WIDTH	WIDTH BETWEEN DISHTABLES	DEPTH		WEIGHT	CLASS	CUBE	HEIGHT	WIDTH	DEPTH
WAREFORCE IHH	79" (2007mm)	30-3/8" (772 mm)	25-1/4" (641 mm)	29-1/2" (749 mm)	9 3/4" (248 mm)	276 lbs (126 kg)	200	67.17 cu. ft.	83.75" (2128 mm)	33" (838 mm)	42" (1067 mm)

POWER REQUIREMENTS	
Electrical Requirement	115V/60HZ/1PH - 11.4A
Service Breaker Size	15A

PERFORMANCE CAPABILITIES	
Flow Pressure (PSI)	20 ± 5
Wash Pump Motor Horsepower	1
Pump Capacity (GPM)	55
Minimum Chlorine Required (PPM)	50

WATER REQUIREMENTS		
	MINIMUM	RECOMMENDED
Inlet Temperature	120°F (49 °C)	140°F (60 °C)
Wash Operating Temperature	120°F (49 °C)	140°F (60 °C)
Rinse Operating Temperature	120°F (49 °C)	140°F (60 °C)

**HOW TO SPECIFY: WAREFORCE IHH**

**WAREFORCE®**

Shipping Address: 6209 North U.S. Highway 25E, Gray, KY 40734  
 Mailing Address: P.O. Box 1060, Barbourville, KY 40906  
 Telephone: 888-800-5672 • Fax: 606-523-1799  
 Email: info@jacksonwws.com  
 07610-004-27-73 [01/16/18]